




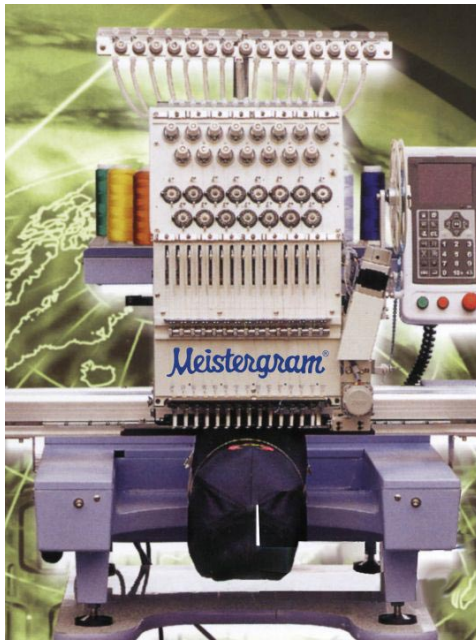


# **Read First**

## **Before Operating your New Meistergram**



1. Assemble the thread stand with the directions enclosed.
2. Carefully check each cone for loose coils of thread that are caught under the cone.
3. Do NOT change adjustments or thread tensions.
4. Remove cap frame and install supplied cap and frame.
5. Remove sewn out test pattern on cap and inspect.
6. Power up embroidery machine.
7. Make sure machine is in preparation mode  (Light will be OFF)
8. Press the  key and then Option 1 for (Origin Back)
9. Put the machine back in Embroidery Mode  (Light will be ON)
10. Press the Start button
11. Set the Speed to 800 Stitches per minute.
12. Compare both hats (front and back) your sample should look like the sample sent with the machine. If not, call 800-872-1555 to speak to service coordinator.



## Unpacking Directions

- Remove the six 10mm screws from the base of the crate (3 on one side, 3 on the other) using an electric screwdriver or a socket and ratchet.
- Two people should be able to lift the crate off to access the machine.
- Remove the plastic cover.
- Remove the rope that will release the tabletop.

- In the front of the machine at the base remove two 13mm screws that will allow you to remove the machine from the bottom of the crate.
- Two people can now lift up the machine at its base and place it on the workstation or working area.
- If you purchased a workstation, mount the embroidery machine to the workstation (which is recommended because it makes the machine more stable and reduces vibration), by carefully lifting one side of the machine at its base and removing the legs. Repeat this process on the other side. There is a bag of bolts inside the box that came with the workstation. Locate the matching holes on the workstation; this is where the bolts will be placed to secure the machine. Begin by inserting the bolt under the shelf up through the hole and into the machine then tighten with a wrench.

# Thread Stand



# Instructions

- Cut the plastic wrap around the thread and upper stand.
- Remove the cardboard packaging.
- Install the two support shafts by screwing them into the top of the thread stand. Tighten the shaft with an adjustable wrench.

- In your tool kit, you will find two allen wrenches, use them to remove the screws on the top of the shafts.
- Secure the thread rack to the top of each shaft.
- Once in place make sure the threads are going straight up to their respective guides.
- Carefully check each cone for loose coils of thread that might be caught under the cone.
- Do **NOT** change adjustments or thread tensions.